
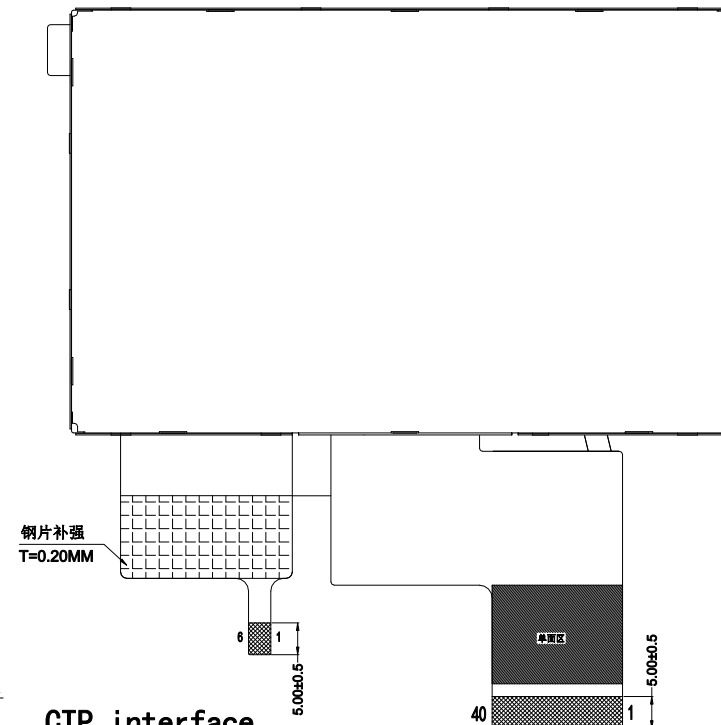



版本	更 改 内 容	拟定	日期
V0	初版发行	CXX	2019. 03. 03

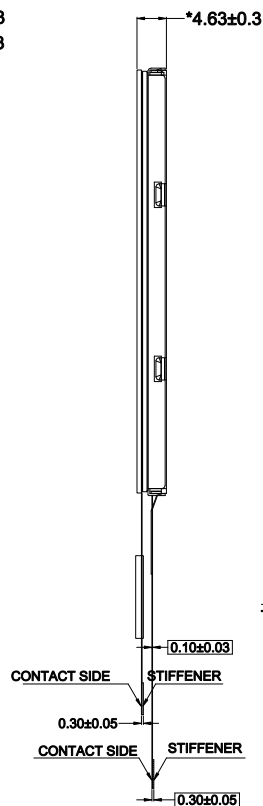

1	K
2	A
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	HSYNC
33	VSYSNC
34	DEN
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU


CTP interface

PIN	Symbol
1	INT
2	SDA
3	SCL
4	RST
5	GND
6	VDD

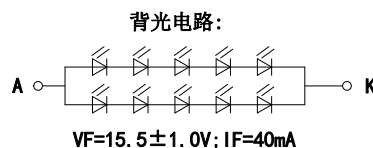

WKS 慧勤智远科技有限公司

第三视角：



DISPLAY TYPE:	4.3''TFT	DISPLAY DRIVER:	-	PIXEL PITCH:	0.1188 X 0.1122 mm	产品型号:	WKS43189				
DISPLAY MODE:	Normally Black	OPERATING TEMP:	-20° C TO +70° C	BRIGHTNESS(cd/m2) :	350cd/m2 (TYP)	部品型号:	LCM 外形图			确认:	Henry
VIEWING DIRECTION:	ALL VIEW	STORAGE TEMP:	-30° C TO +80° C	BACKLIGHT:	LED WHITE (5x2=10)	版本:	V0	单位:	mm	审核:	Eric
Dot matrix:	800(RGB) X480 DOTS	STRUCTURE:	LCD+IC+FPC+BL+CTP	MATERIAL NOTE	ROHS REQUEST	日期:	2019-03-03	比例:	1:1	设计:	Jason
THIS DRAWING IS PROPERTY OF WKS CO. LTD. IT CANNOT BE REPRODUCED WITHOUT PERMISSION.						Unmarked Tolerance:			±0.20 mm	页码:	1 OF 1